

19" High Quality Export Rack

Characteristics of the 19" High Quality Export Rack

- **Design:** 19" High Quality Export Rack is designed and produced to be the Modular Knock-down System which is very easy to assemble.
- **Material:** The rack is made of 1.5 mm Electro-Galvanized steel Sheet which is a thick, durable and 100% rustproof material.
- **Frame:** Vertical Mounted Frame is made of 2.0 mm Electro-Galvanized Steel Sheet which is a thick, durable and 100% rustproof material. It can be adjusted depending on the depth of the rack as requirement.
- **Base:** A base of the rack is made of 2.0 mm Electro-Galvanized Steel Sheet and a base for casters is made of 3.0 mm Electro-Galvanized Steel Sheet which are thick, durable and 100% rustproof.
- **Roof:** The roof of the rack can be installed ventilating fan from 1 unit to 6 units. It can be used to put cables through the hole or can be designed as a high-roof. (Optional)
- **Light Built-in:** The inside of the rack can be installed a PL-7w light and a limit switch and the light will switch on-off automatically when the rear doors is opened and closed. (Optional)
- **Front Door:** The front door is 5 mm-transparency brown acrylic plastic which is thick and lightweight. It has a seal on the edge of the door to prevent dust. The front door has Aluminum hinges and turn-locks for security. It can be set to right swing open or left swing open.
- **Rear Door:** The rear door is perforated for ventilation at the bottom of the rear door and has a dust-proof filter for covering. It has a seal on the edge of the door to prevent dust. The rear door has Aluminum hinges and push-locks for security. The door can be set to right swing open or left swing open.
- **Bottom Rack:** The bottom rack can put cables through the hole and has a slide shutter to protect animals. It can be added a ventilating fan. (Optional)
- **Side Panel:** The side panel secures with two turn-locks and it is convenient to maintain.
- **Hinges:** The black hinges of the front-rear door are made of Aluminum which is heavy-duty and 100% rustproof.
- **Stands:** The rack has four stands which are easy to adjust as requirement.
- **Casters:** The rack has four casters which are made of White Nylon Six. The casters can turn around 360 degree and load 100 Kg./caster.
- **Ground System:** There is the Ground System all parts of the rack with the earth cable kit.
- **Color:** The rack is a two-tone (light gray and dark gray) which is coated with powder epoxy by Electro-Static System for strength.
- **Accessories:** The rack is designed to provide customers with M6 bolts, cage nuts and plastic washers.
- **Quality Product Standard:** The racks meet quality product standards which are ANIS/EIA-310D-1992 (Rev.EIA-310-C), IEC 60297-1, IEC 60297-2, BS 5954: Part 2, DIN 41494.
- **Manufacturing standard:** ISO 9001: 2000 Company




19" High Quality Export Rack

| u | Height (mm.) | Height effective (mm.) | Order NO. (Width* x Depth* : mm.) | | | | |
|-----------------|--------------|------------------------|-----------------------------------|---------|---------|----------|----------|
| | H | h | 600x600 | 600x800 | 600x900 | 600x1000 | 600x1100 |
| 15U = 44.45 mm. | | | | | | | |
| 15U | 850 | 670 | PM-6615 | PM-6815 | - | - | - |
| 27U | 1390 | 1200 | PM-6627 | PM-6827 | PM-6927 | PM-6027 | - |
| 36U | 1790 | 1600 | PM-6636 | PM-6836 | PM-6936 | PM-6036 | - |
| 39U | 1915 | 1735 | PM-6639 | PM-6839 | PM-6939 | PM-6039 | - |
| 42U | 2050 | 1870 | PM-6642 | PM-6842 | PM-6942 | PM-6042 | PM-6142 |
| 45U | 2185 | 2000 | PM-6645 | PM-6845 | PM-6945 | PM-6045 | PM-6145 |

Remark: Width* = Require 800 mm. in width, please contact distributor.

Depth* = Not include the Depth of the front door and the rear door.

Illustration

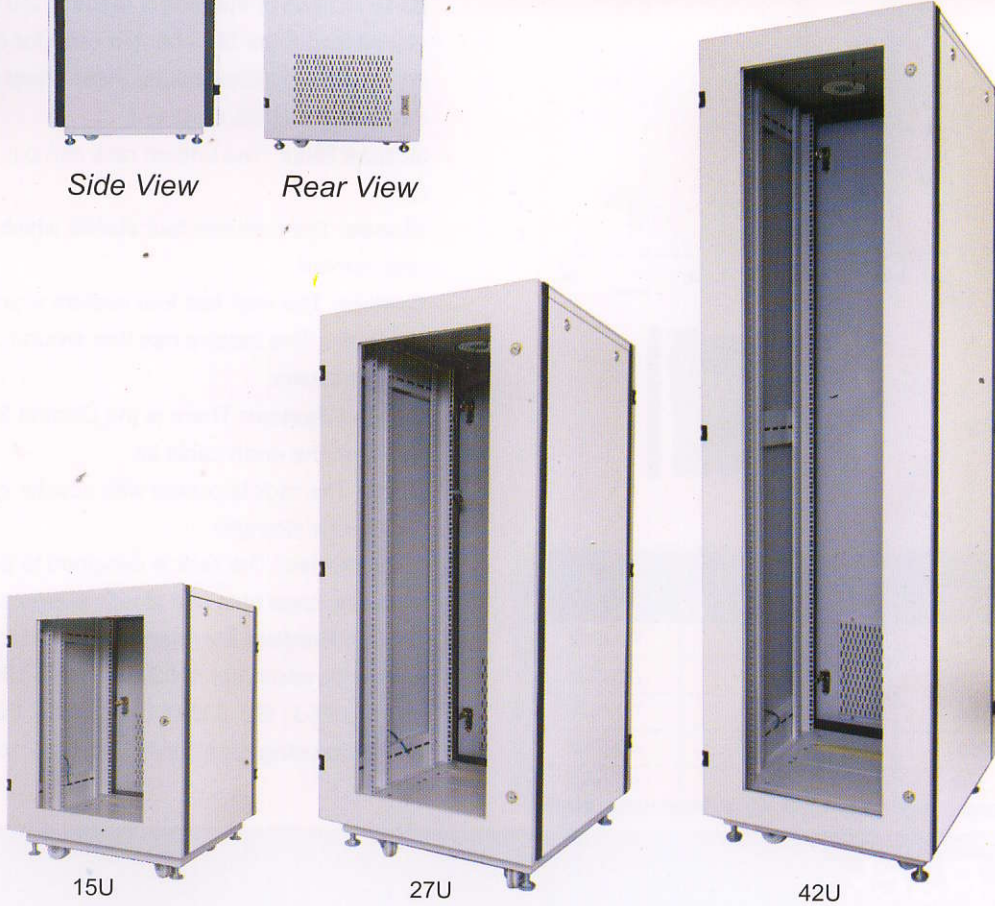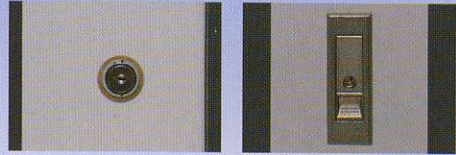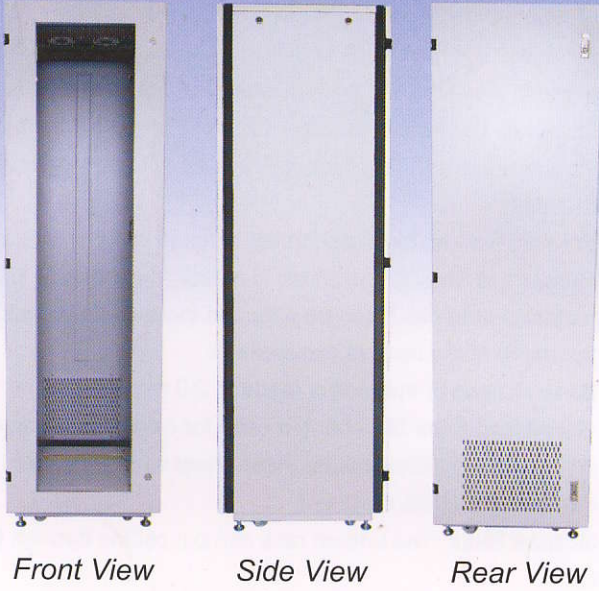

Remark:

*H= Height, h=Height Effective,
W=Width, D=Depth*

